

SPORTEC® purcolor is the ideal flooring for offices, retail and outlets and other frequently used rooms. Thanks to its strong colours, it can be perfectly matched to the interior design, while offering effective impact and room noise and improved walking comfort. Other reasons that speak for **SPORTEC® purcolor** are the easy installation and cleaning of the floor covering.

Material


Material:

85% coloured EPDM granules and 15% black EPDM granules bonded with polyurethane elastomer.

Product design


Colour(s): light grey, dark grey, blue, red, middle grey
(other colours on request)
low colour differences are conditional of material

Colour(s):

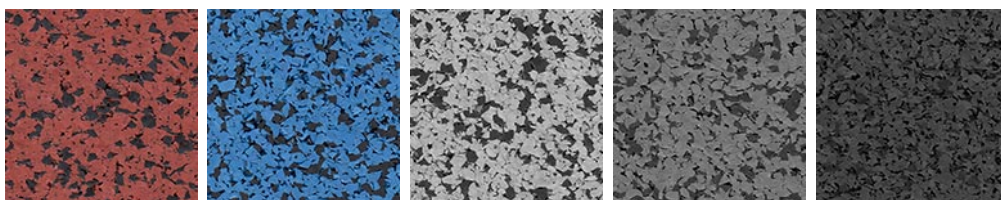

purcolor red, purcolor blue, purcolor light grey, purcolor medium grey, purcolor dark grey

Surface: fine granule structure with coloured EPDM granules

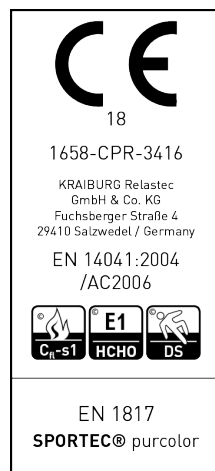

The product data sheet is not subject to any change service! All information is without guarantee.

Latest version of this document available on www.kraiburg-relastec.com/sportec

Dimensions / Tolerances / Weight

Thickness(es):	4, 6, 8 mm (± 0.3 mm) (other thicknesses on request)
Roll width:	1,250 mm (± 1.5 %)
Roll length:	30 m (at 4 mm) 20 m (at 6 mm) 15 m (at 8 mm)
Density:	approx. 1,250 kg/m ³
Area weight:	approx. 5.0 kg/m ² (at 4 mm) approx. 7.5 kg/m ² (at 6 mm) approx. 10.0 kg/m ² (at 8 mm)

Product Testing

Fire resistance:	C _{fl} -s1 (B1) (DIN EN 13501-1)
Tensile strength:	min. 0.7 N/mm ² (EN ISO 1798)
Elongation at break:	min. 70 % (EN ISO 1798)
Hardness:	60 \pm 5 Shore A (DIN 53505)
Temperature range:	-30°C to 80°C (internal test)
Coefficient of friction:	> 0.30 μ (DS) (EN 13893)
Anti-slip property:	R 9 (DIN 51130) R 11 (sealed with RZ turbo protect zero + RZ grip)
Step sound insulation:	16 dB (at 6 mm) (DIN EN ISO 140-8:1998-03) 18 dB (at 8 mm) (DIN EN ISO 140-8:1998-03)
Sound absorption:	$\alpha_w = 0.15$ (at 6 mm) (DIN EN ISO 354:2003-12) $\alpha_w = 0.15$ (at 8 mm) (DIN EN ISO 354:2003-12)
Remaining deformation:	1.32 mm (at 6 mm) (EN 433:1994-11) 0.54 mm (at 8 mm) (EN 433:1994-11)
Compression set:	approx. 15 % (internal tested)



The product data sheet is not subject to any change service! All information is without guarantee.


Latest version of this document available on www.kraiburg-relastec.com/sportec

page 2 of 4

- Electrostatic properties: 2.6 kV (DIN EN 1815:1995-06)
- Thermal resistance: 0.029 m²K/W (at 4 mm) (DIN EN 12664:2001)
(Suitable for underfloor heating)
- Light fastness: 4 (5*) (grey scale) (DIN EN 105-B02:2002)
(* when sealed with suitable 2-K-PU sealer)
- Castor chair suitability: for permanent use adapted (DIN EN 1307: 1997-06)
(Tested at 6 mm and 8 mm thickness)
- VOC emission rating:




Shock absorption:

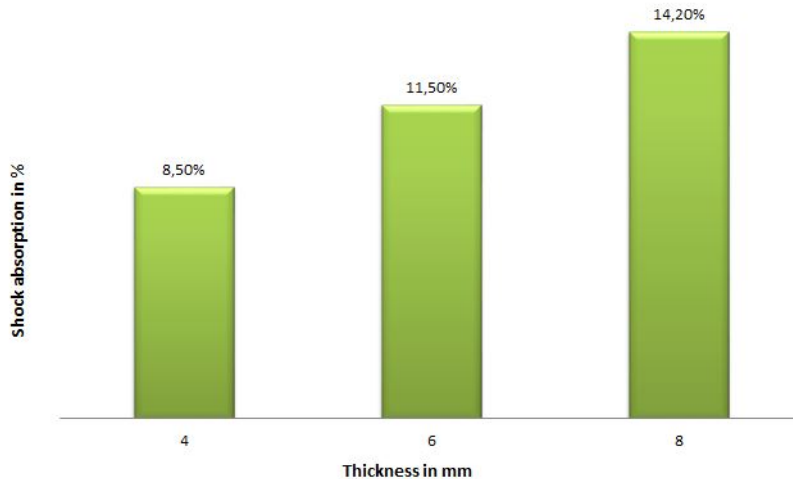

Installation

Installation has to be done in accordance to the Installation Recommendation of **SPORTEC® purcolor**. The latest version of the Installation Recommendation can be downloaded at the website of KRAIBURG Relastec GmbH & Co. KG.

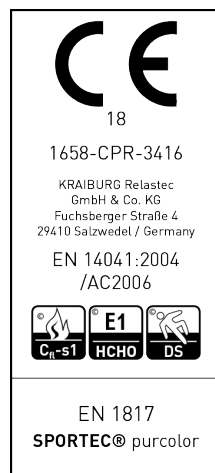

The product data sheet is not subject to any change service! All information is without guarantee.

Latest version of this document available on www.kraiburg-relastec.com/sportec

Sealing

It is recommended to seal the floor covering **SPORTEC® purcolor** with 2 components PU sealer system "RZ turbo protect zero" which is available directly from our company.

Small damages at the sealed surface can be tread afterword by using a „RZ Refresher Set“ to retain the visual effect.



The product data sheet is not subject to any change service! All information is without guarantee.

Latest version of this document available on www.kraiburg-relastec.com/sportec

page 4 of 4